

Technical data sheet

Junction box T 25, plug-in seal

Item number: 2007509



Junction box for the connection of cables and lines indoors and in protected outdoor areas. Round design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting, on mounting panels and threads in the floor. With the option to fasten inside. With fixed clamping cover. Made from halogen-free and UV-resistant materials. Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650 °C. Impact resistance IK07 according to DIN EN 50102.



PP Polypropylene

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 2007509 |
| Type | T 25 RW |
| Description 1 | Junction box |
| Description 2 | with entries |
| Manufacturer | OBO |
| Dimension | Ø80x51 |
| Colour | Pure white; RAL 9010 |
| Material | Polypropylene |
| Smallest sales unit | 5 |
| Unit of quantity | Piece |
| Weight | 4.19 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1917 kg CO2e / 1 Piece |



Technical data sheet

Junction box T 25, plug-in seal

Item number: 2007509



Dimensions

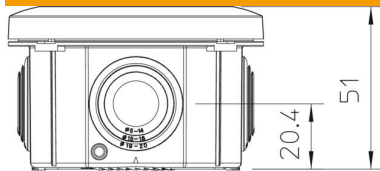

| | |
|--------|-------|
| Height | 51 mm |
|--------|-------|

Technical data

| | |
|-----------------------------------|---|
| Expandable | yes |
| No. of entries | 4 |
| Type of entry | Plug-in seal |
| Type of entry | Cable |
| Type of housing penetration | Cuttable stepped membrane |
| Measured insulation voltage V_i | 500 V |
| Cover | Not transparent |
| Cover fastening | Locking |
| Entry from rear | yes |
| Entries | 4 x M25 |
| Explosion-tested version | no |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Shape | Round |
| Maintain electrical functions | Without |
| For Ex zone | Without |
| For Ex zone gas | Without |
| For Ex zone dust | Without |
| Fibre-glass reinforced | no |
| Halogen-free | yes |
| Clear internal dimensions | Ø63x45 mm |
| With screening | no |
| with lid | yes |
| Mounting type | Wall/ceiling mounting |
| Nominal cross-section, min. | 2.5 mm ² |
| Nominal voltage | 500 V |
| Sealable | no |
| Protection rating | IP65 |
| Protection rating IK code | IK07 |
| Permitted temperature range, max. | 65 °C |
| Permitted temperature range, min. | -25 °C |
| Transparent lid | no |

Technical data sheet

Junction box T 25, plug-in seal

Item number: 2007509



Technical data

| | |
|--------------|----|
| Weatherproof | no |
|--------------|----|