

# Technical data sheet

Underfloor installation duct, 3-compartment, trunking  
height 38 mm  
Item number: 7400328



Underfloor installation duct for laying cables under the floor.



- St** Steel
- FS** Strip galvanized

## Master data

Item number	7400328
Type	S3 25038
Description 1	Underfloor duct
Description 2	3 compartments
Manufacturer	OBO
Dimension	2000x250x38
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	466 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	9,845 kg COe / 1 Meter


# Technical data sheet

Underfloor installation duct, 3-compartment, trunking height 38 mm

Item number: 7400328



## Dimensions

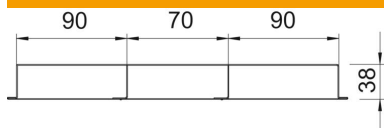

Length	2,000 mm
Width	250 mm
Height	38 mm
Dimension a	90 mm
Dimension b	70 mm
Dimension h	38 mm

## Technical data

Number of fixed partitions	2
Number of compartments	3 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Duct height, min.	38 mm
Usable cross-section	8820 mm <sup>2</sup>
Removable cover	no
Cross-section, draw a	3168 mm <sup>2</sup>
Cross-section, draw b	2484 mm <sup>2</sup>